

DSP803

10W Ceiling Speaker



Description

DSP803 is a ceiling speaker with built-in 70V/100V transformer. The 70V/100V transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible. The built-in 6.5" speaker driver is designed of wide frequency response 80Hz ~ 14kHz. Its made of high quality steel material, which ensures long-term durability, and will never be out of shape or fading; spring clip clamp makes the easy and secure installation; driver surround excellent damping, long life, clear and sonorous sound.

Features

- 70/100V, 1.5 ~ 10W with multiple terminals
- 6.5" paper cone driver unit
- Max. SPL.: 102±2 dB
- Effective Freq. Range 80Hz ~ 14kHz
- Rated power output at 10W
- High sensitivity(92±2dB)
- High-class steel material


Specifications

Model		DSP803
Speaker Unit		6.5"×1
Rated Power		10W
Line Voltage	70V	1.5W/3W/5W
	100V	3W/6W/10W
Sensitivity (1m, 1W)		92+2dB
Max. SPL (1m)		102+2dB
Effective Frequency Range		80Hz-14kHz
Weight		1.1kg

Product Information


Freq. Response

(dB SPL, 1W, 1m)

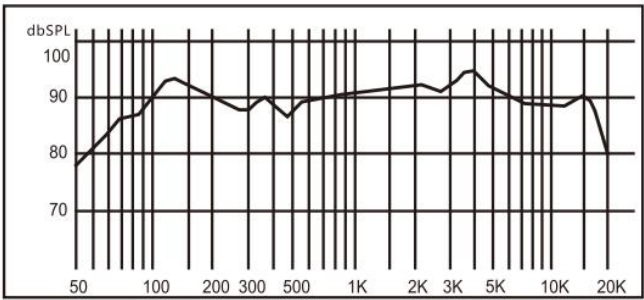

Distortion

(THD<1.5% 1W, 1m, 200Hz-10kHz)

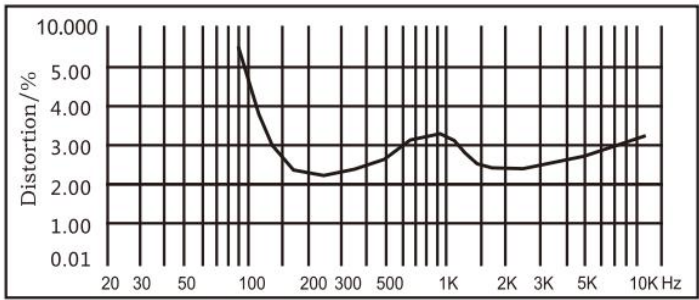

Dimensions

