

DSP1650

50W Waterproof Horn Speaker with Power Tap





Description

The DSP1650 waterproof horn speaker, with ABS horn and stainless steel bracket special designed for extreme weather conditions and outdoor installations. This speaker is solid and durable, long lifetime, high acoustic quality and wide coverage. Suitable for vehicle-bone, station, wharf, square installations for public security, tourism, teaching, transportation and environment use. 70V/100V transformer with variable power adaption.

Features

- Rated power: 50W
- Input signal:70/100V&8 Ω
- Input power: 6W/12.5W/25W/50W
- Frequency response: 280Hz-4.5kHz
- Sensitivity 106 \pm 2dB;
- MAX SPL: 123±2dB
- Color: White, support OEM color
- IP rating: IP66
- Dimensions(W×H×L): 404*266*376mm

Specifications

| Model | DSP1650 |
|---------------------------|-------------------------------------|
| Rated Power | 50W |
| Power Tap | 0- 6W-12.5W-25W-50W-8Ω (100V input) |
| Input Voltage / Impedance | 100V/8Ω |
| Frequency Response Range | 280Hz-4.5kHz |
| Sensitivity | 106±2dB |
| Sound Pressure Level | 123±2dB |


export@dsppa.com / www.dsppatech.com

The specifications will be subject to change without prior notice. Copyright © Guangzhou DSPPA Audio Co.,Ltd All rights served.

| Dimension | 404(W) × 266(H)× 376(L)mm |
|---------------------|--|
| Weight | 4.2kg |
| Material&Finish | Finish: White ; |
| | Horn: ABS, Bracket: Steel |
| Working Environment | Temp -20 $^\circ C$ ~ +40 $^\circ C$, Humidity 45% ~ 85%, |
| | Elevation under 1000 m, Dust, corrosive gas or |
| | vibration which requires special condition must not |
| | exist |

Product Information

Dimension Diagram

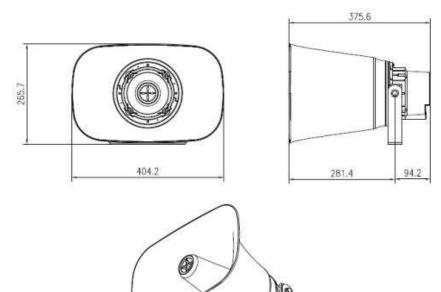

Frequency Response @ /1W/1m

