

DSP903II DSP903A

Fireproof Ceiling Speaker with Transformer



Description

This product is a fireproof ceiling speaker with transformer. The mesh cover is designed with fine-hole aluminum, which is rustproof and durable, and the fireproof cover is molded with high-quality steel stamping. With powerful movable clamp, it is durable and reliable, easy to install. The speaker mounting plate is provided with protective rubber to protect ceiling material.

Features

- For use in public address and background music playing.
- Clear and bright sound, high-quality music enjoyment.
- Delicate appearance allows the speaker to fit perfectly into any indoor environment.
- Equipped with fire-proof rear cover for enhanced protection of cable terminals.

Specifications

For DSP903II


Model		DSP903II
Speaker Unit		6.5"×1
RMS		6W
Working Voltage	100V	3W/6W
Sensitivity (1m, 1W)		90dB±2dB
MAX. SPL. (1m)		97dB±2dB
Frequency Response		180Hz~16kHz
Dimensions (H×W×D)		200×200×98mm
Weight		1.04kg

For DSP903A

Model		DSP903A
Acoustic System	Speaker Unit	6.5"×1
	Sensitivity (1m, 1W)	90dB±2dB
	MAX. SPL. (1m)	97dB±2dB
	Frequency Response	180Hz~16kHz


Amplifier System	RMS	6W
	Sensitivity	200mV
	Distortion	< 0.1%
	Freq. Resp. (20Hz-20KHz)	±1dB
	SNR	≥92dB
Power Input	Voltage	~220V/50Hz
Others	Dimensions (H×W×D)	200×200×98mm
	Weight	1.10kg

Product Information

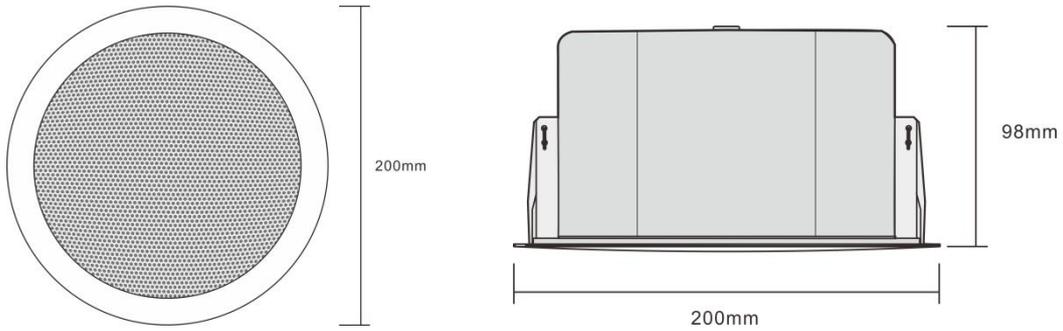



Technical Parameters

Frequency Response
(dB SPL, 1W, 1m)

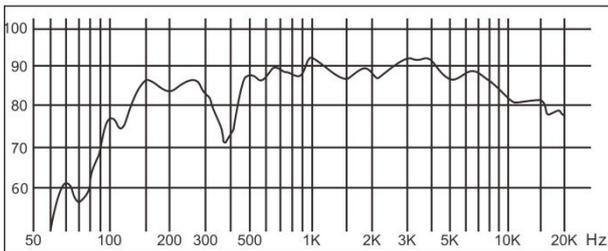


Distortion

(THD < 5% 1W, 1m, 100Hz-10kHz)

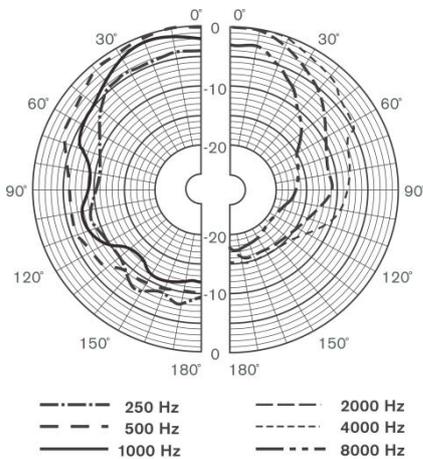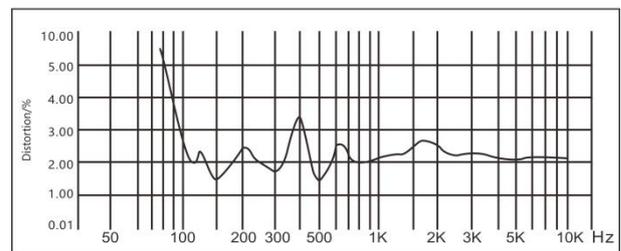

Vertical directional pattern

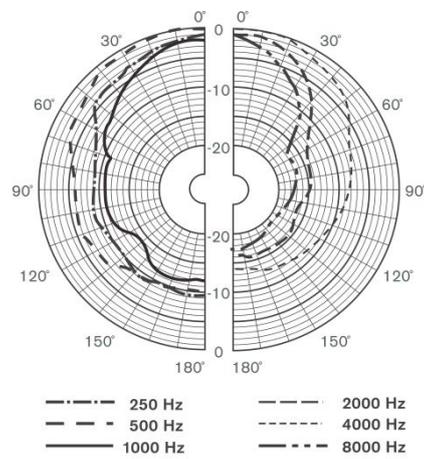

Horizontal directional pattern