


DSP188 Outdoor Waterproof Dual Direction Column Speaker

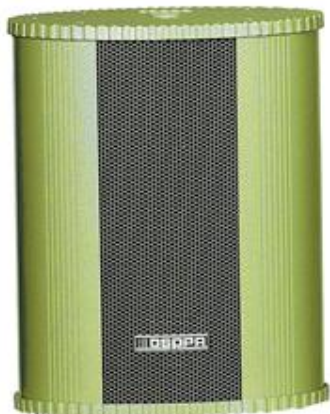

Features

- IP66 waterproof level
- Dual direction phonating
- Wide Freq.Resp.:140Hz-14kHz
- Aluminum enclosure & grille
- Built-in 100v/70v transformer
- Max SPL:100±2dB
- High sensitivity:88±2dB
- Weatherproof column type loudspeaker
- 2 units 4" and 2 unit 2.5" full range drivers

Description

The DSP188 is a weatherproof outdoor column speaker with a 70v/100v transformer built-in. The 70v/100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.

The built-in 2 units 4" and 2 unit 2.5" full range speaker drivers are designed of wide frequency response 140-14,000Hz, the multiple power taps of 15W & 30W could meet different applications varies from room size and ambient noise surroundings.



The net cover is made of aluminum and would not rust, it is also designed of weatherproof and heavy damage proof finish; long-term durability, high sensitivity, dual direction phonating, clear and sonorous sound. Easy and secure wall mount installation in outdoor area through the supplied pair of metal mounting brackets.

It is ideal choice for industrial and commercial applications in the outdoor area of train station, shopping mall, parking area and factory where background music and paging is needed.

Specification

Model	DSP188
Full-range	4"×2, 2.5"×2
Rated Power	15W
Max Power	30W
Line Voltage	70/100V
Sensitivity(1M,1W)	88±2dB
Max SPL(1M)	100±2dB
Freq. Resp	140Hz-14kHz
Dimension(L×W×H)	160×250×310mm
Weight	3kg

Positioning Dimensions & Diagram



Installation


1. Fit 2 Ø8mm screws on the mounting surface and set the speaker system as above;
2. Connect audio broadcasting wire to the terminals according to the table below;

Power Terminals	Line Voltage	70V	100V
Red---Blue		8W	15W
Red---White		15W	30W

3. Adjust the direction of the set and examine whether it is steady.

FREQ. RESPONSE

(dB SPL, 1W, 1m)

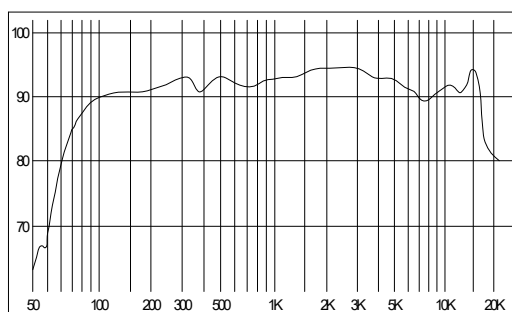

DISTORTION

(THD<1.5% 1W, 1m, 140Hz~14kHz)

