

# ZR1

## Alarm Siren

Siren can be used as a home security system with the Imou detectors. When the Imou sensor detects an intrusion, Siren will ring and the volume can reach up to 85dB. The user can cancel the alarm locally through the gateway, or mute the sound with one key through the APP.



### Flexible installation

Support wall/ceiling installation.



### Sound and light deterrence

When triggered, sound and light alarms will deter intruders.



### Alarm message push

When an alarm occurs, the phone will also receive a message push.



### Volume adjustment

Support volume adjustment through APP, up to 85dB.



### Smart scene linkage


Interconnect with other smart home devices, such as IPC and light bulbs.



### Tamper-proof design

When the device is moved, it will push the alarm message.

## Overview

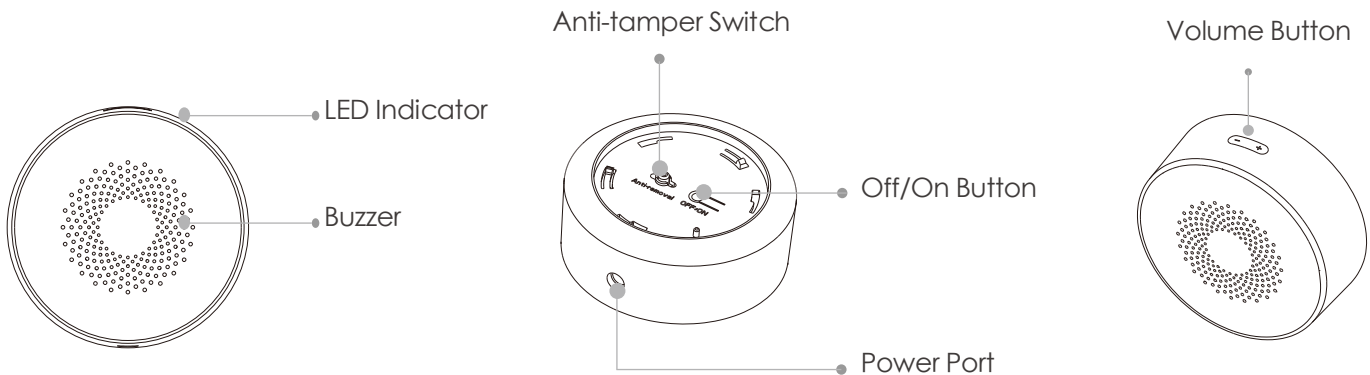

## Specifications

---

### General

Appearance size:  $\Phi 80 \times 34 \text{mm}$   
Working voltage: DC 12V  
Standby current:  $\leq 20 \mu\text{A}$   
Working current:  $\leq 250 \text{mA}$   
Operatign temperature:  $-14^{\circ}\text{F}$  to  $+131^{\circ}\text{F}$   
Installation method: wall/ceiling

### Sound

Buzzer sound pressure:  $\geq 85 \text{dB}$

### Network

Wireless protocol: Zigbee  
Transmit frequency: 2.4GHz  
Transmit power:  $\leq 15 \text{dBm}$   
Communication distance: 200m  
Receiving sensitivity :  $-96 \text{dBm}$

## What's in the box

---

- 1x Alarm Siren
- 1x 3M Sticker
- 1x Screw and Anchor

- 1x Power Adapter
- 1x Quick Start Guide

